



# RX MARINE INTERNATIONAL

## Total Solution Total Protection

AN ISO CERTIFIED COMPANY



## CTC Volc Cleaner

<b>Part/Order no:</b>	<b>Packing</b>
RXSOL-20-2028-25	25 Ltr
RXSOL-20-2028-210	210 Ltr

### Product Description:

RXSOL-20-2028 is a very strong cleaner, which can be used to soften up / remove baked on drying oils and used after animal and vegetable oils, fish oils, tall oils, tug oils etc .It is low toxic product with an exceptional solvency power on soil & oily matter. It is free from hydrocarbon solvents, Biodegradable minimizes the extreme hazards to personnel in handling materials.Suitable for cleaning of Lube oils Gas oil Kerosene Mineral oil Products. Phthalates paraffin's vegetable oils Odour intensive products.

### Using-Procedure:

First of all flush the system with cold water to prevent evaporation rates and polymerization then the most economical method of using RXSOL-20-2028 is by direct injection followed by recirculation washing, using tank cleaning machines.

### Spraying Method:

Using CTC as delivered in drums, spray onto areas where residue remains following rough washing leave for 10-45 minutes (but do not allow to dry), then butterworth at maximum pressure and warm water 60oC for at least 3 hours, checking that there is no foam remaining in the final stages. Inspects tanks(s) and if desired result has been achieved fresh water rinse and dry.

Make sure to take all safety precautions are followed when handling / spraying CTC.

### Injection Method:

Not applicable.

### Re- Circulation Method:

Fill tank with fresh water and heat up to warm 50oC . IF a drop line is available on the tank line system, then start to circulate the water and add the required amount of Caustic flakes and CTC to make a 2.5% solution. A stronger solution can be made, but be advised that too much Caustic and too high temperature will result in white powder all over the tank. Under normal circumstances, between 2.5% and 4.5% will be sufficient strength. If there is no drop line, then lower butterworth hoses into the tank from the pump stack header without machines attached and circulate through these hoses while you fill the solution material.

Use a strainer at the pump stack when circulating any solution.\*\* Tank Lining– Stainless / Epoxy / Phenolic.

### Dose:

Necessary concentration in water only 0,2 to 0,4 %.


- Removes grease, oil, carbon deposits, soil and grime.
- Keeps loosened deposits in suspension preventing re-deposition.
- Low toxic. , Non-flammable.
- Free from hydrocarbon solvents.

- Effective and economical in use , Water-based cleaner.
- RXSOL-20-2028-210 has numerous cleaning applications including removal of greases, waxes, oil, sludge, soot, carbon deposits and general dirt and grime.
- Non-corrosive to ferrous metals.Suitable for all Tank coatings.
- Can be used for gas and hydrocarbon freeing of tanks.
- Can be used for deodorizing.



**Note:**

Acts as an acid-neutralizing agent also.

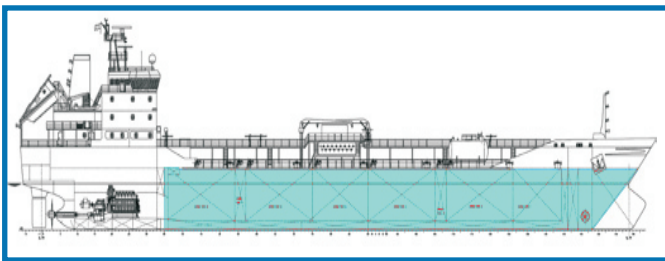

**WEBSITE LINK**

**Membership Plan**

Our main goal is to provide the Best services To our valued customers. Our services are built around providing you with best quality products at very low cost. We believe that this will help you to maximize the benefits.



Membership Plan	Yellow	SILVER	GOLD
Discount	25%	30%	35%
Amount	15,000	45,000	60,000

**Membership Plan Benefits**

1. Get High Quality Product into Low price.
2. All amount paid for the membership plan to be refundable.
3. Same price in India ,UAE, Singapore,Bahrain.
4. Members are Offered to supply the RXSOL Brand on behalf of Rx Marine International to Know more  
visit our web site :<http://rxmarine.com>